

SIDE ENTRY MULTI PORT PCB JACK FCC-68



7652 SERIES. Right angle PCB jack. Single Level.


General Features

- Available in 8/8 circuits
- Standard telephone jack FCC-68
- Available in 2, 4, 5, 6, 8, 10 and 12 ports
- 13.60 mm. height
- Accept standard plugs FCC-68
- Selective gold with different plating
- Bifurcated plastic foot print

Materials

- Insulator: Thermoplastic UL 94V-0
- Contact: 0.46 mm round in phosphor bronze
- Operating temperature. -25°C to + 85°C
- RoHS compliant

Dimensional Information

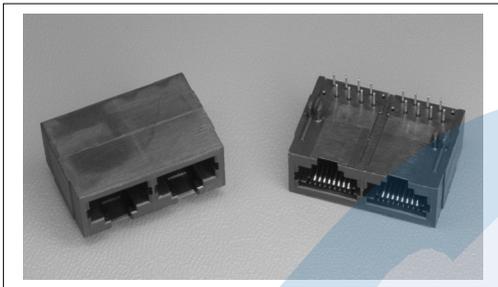

Electrical Features

- Voltage rating: < 125V
- Current rating: < 1.50 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 300 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Durability: 1000 cycles

Ports	Part Number	Dimensions		
		A	B	C
2	7652 – T021	30.48 (1.200)	13.97 (0.550)	25.40 (1.000)
4	7652 – T041	58.42 (2.300)	41.91 (1.650)	53.34 (2.100)
5	7652 – T051	72.39 (2.850)	55.88 (2.200)	67.31 (2.650)
6	7652 – T061	86.36 (3.400)	69.85 (2.750)	81.28 (3.200)
8	7652 – T081	114.30 (4.500)	97.79 (3.850)	109.22 (4.300)
10	7652 – T101	142.24 (5.600)	125.73 (4.950)	137.16 (5.400)
12	7652 – T121	170.18 (6.700)	153.67 (6.050)	165.10 (6.500)

T = Plating Options

- T = 4. 6μ" gold over nickel
- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel
- T = 7. 50μ" gold over nickel

